


8	O-RING	EPDM
7	BUSHING	PTFE
6	COVER	CI/DI/CF8M/CF8
5	TAPER PIN	SS
4	STEM	SS410
3	SEAT	NBR/EPDM/VITON
2	DISC	CI/DI/CF8M/CF8
1	BODY	CI/DI/CF8M/CF8
NO. PARTS NAME		MATERIAL

DISC COATED OPTION:
 (1) : coated PTFE
 (2) : coated nylon 11



DN	H1	H2	HB	L	ϕA	ϕE	ϕB	ϕF	$\square M$	D N FN10		D N FN16		ANSI B16.1		JI S 10K	
										ϕC	n- ϕ	ϕC	n- ϕ	ϕC	n- ϕ	ϕC	n- ϕ
DN40	70	110	32	35	12.7	92	70	9	9	110	4- $\phi 18$	110	4- $\phi 18$	98.5	4- $\phi 16$	95	4- $\phi 15$
DN50	76	162	32	45	12.7	92	70	9	9	125	4- $\phi 18$	125	4- $\phi 18$	120.65	4- $\phi 19$	120	4- $\phi 19$
DN65	89	175	32	48	12.7	92	70	9	9	145	4- $\phi 18$	145	4- $\phi 18$	139.7	4- $\phi 19$	140	4- $\phi 19$
DN80	95	181	32	49	12.7	92	70	9	9	160	4- $\phi 18$	160	8- $\phi 18$	152.4	4- $\phi 19$	150	4- $\phi 19$
DN100	114	200	32	55	15.8	92	70	9	11	180	8- $\phi 18$	180	8- $\phi 18$	190.5	8- $\phi 19$	175	8- $\phi 19$
DN125	127	213	32	58	19.05	92	70	9	14	210	8- $\phi 18$	210	8- $\phi 18$	215.9	8- $\phi 22$	210	8- $\phi 22$
DN150	140	225	32	59	19.05	92	70	9	14	240	8- $\phi 23$	240	8- $\phi 23$	241.3	8- $\phi 22$	240	8- $\phi 22$
DN200	177	260	36	64	22.2	125	102	11	17	295	8- $\phi 23$	295	12- $\phi 23$	298.45	8- $\phi 22$	290	8- $\phi 22$
DN250	203	292	36	70	28.6	125	102	11	22	350	12- $\phi 23$	355	12- $\phi 27$	361.95	12- $\phi 25$	355	12- $\phi 25$
DN300	242	337	36	80	31.8	150	125	13	22	400	12- $\phi 23$	410	12- $\phi 27$	431.8	12- $\phi 25$	400	16- $\phi 25$
DN350	267	368	45	80	31.8	150	125	13	22	460	16- $\phi 23$	470	16- $\phi 27$	476.25	12- $\phi 29$	445	16- $\phi 25$
DN400	298	400	51	90	33.3	210	165	22	22	515	16- $\phi 27$	525	16- $\phi 30$	539.75	16- $\phi 29$	510	16- $\phi 27$
DN450	318	422	51	109	38	210	165	22	27	565	20- $\phi 27$	585	20- $\phi 30$	577.85	16- $\phi 32$	565	20- $\phi 27$
DN500	349	479	64	135	41.15	210	165	22	27	620	20- $\phi 27$	650	20- $\phi 33$	635	20- $\phi 32$	620	20- $\phi 27$
DN600	410	562	70	156	50.65	300	254	18	36	725	20- $\phi 30$	770	20- $\phi 36$	749.3	20- $\phi 35$	730	24- $\phi 33$
DN700	520	624	72	169	55	300	254	18	40	840	24- $\phi 30$	840	24- $\phi 36$	-	-	840	24- $\phi 33$
DN750	516	624	72	175	55	300	254	18	40	-	-	-	-	914.5	4-1 1/4\"-6	900	24- $\phi 33$
DN800	591	672	83	195	55	300	254	18	40	950	24- $\phi 33$	950	24- $\phi 39$	977.9	4-1 1/2\"-6	950	28- $\phi 33$
DN900	611	768	77	211	74.25	300	254	18	53	1050	28- $\phi 33$	1050	28- $\phi 39$	1086	4-1 1/2\"-6	1050	28- $\phi 33$
DN1000	665	823	85	229	84.2	300	254	18	60	1160	28- $\phi 36$	1170	28- $\phi 42$	-	-	1160	28- $\phi 39$
DN1200	955	880	206	249	92	350	298	22	60	1380	32- $\phi 39$	-	-	1422.5	44- $\phi 41$	1380	32- $\phi 39$

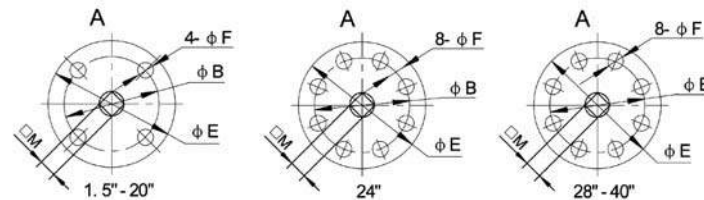

DIE ERSTE INDUSTRY CO., LTD,
 TAICHANG, TAIWAN

SHEET 1 OF 1

DRWN BY:

APPROVAL:

UNIT: mm

DO NOT SCALE DRAWING

TITLE:

REV

REMARK

DANNY HSU
07/02/17

PROJECT:

DWG. NO.

Wafer Type Butterfly Valve

1.0

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF «DIE ERSTE INDUSTRY CO., LTD.». ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF «DIE ERSTE INDUSTRY CO., LTD.» IS PROHIBITED.